




ACTIVE ACOUSTIC ABSORBER

WIDE FREQUENCY RANGE · COMPACT · ACTIVE

SilentFlow is a range of circular acoustic silencers for 160 mm ducts. The active version adds electro-acoustic membranes to enhance performance at low frequencies, even with short treatment lengths.

TRANSMISSION LOSS - THIRD OCTAVE BANDS

Respecting ISO7235 in our labs

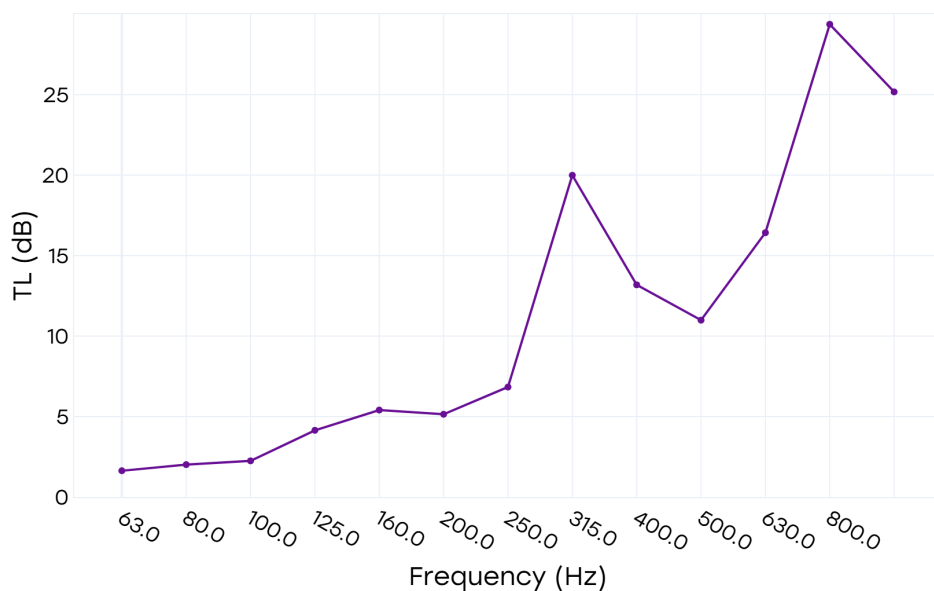

Active

| | |
|------|------|
| 63 | 1.6 |
| 80 | 2.0 |
| 100 | 2.3 |
| 125 | 4.1 |
| 160 | 5.4 |
| 200 | 5.1 |
| 250 | 6.8 |
| 315 | 20.0 |
| 400 | 13.2 |
| 500 | 11.0 |
| 630 | 16.4 |
| 800 | 29.4 |
| 1000 | 21.2 |

MECHANICAL PROPERTIES

| | |
|-----------------|-----------|
| Int. diameter | 159 mm |
| Ext. diameter | 326 mm |
| Length | 290 mm |
| Mass | 4.7 kg |
| Electric supply | 220V / 5W |

