




PASSIVE ACOUSTIC ABSORBER

WIDE FREQUENCY RANGE · COMPACT · PASSIVE

SilentFlow is a range of circular acoustic silencers for 160 mm ducts. The passive version is very cost-effective, using only porous materials to efficiently attenuate mid and high frequencies.

TRANSMISSION LOSS - THIRD OCTAVE BANDS

Respecting ISO7235 in our labs

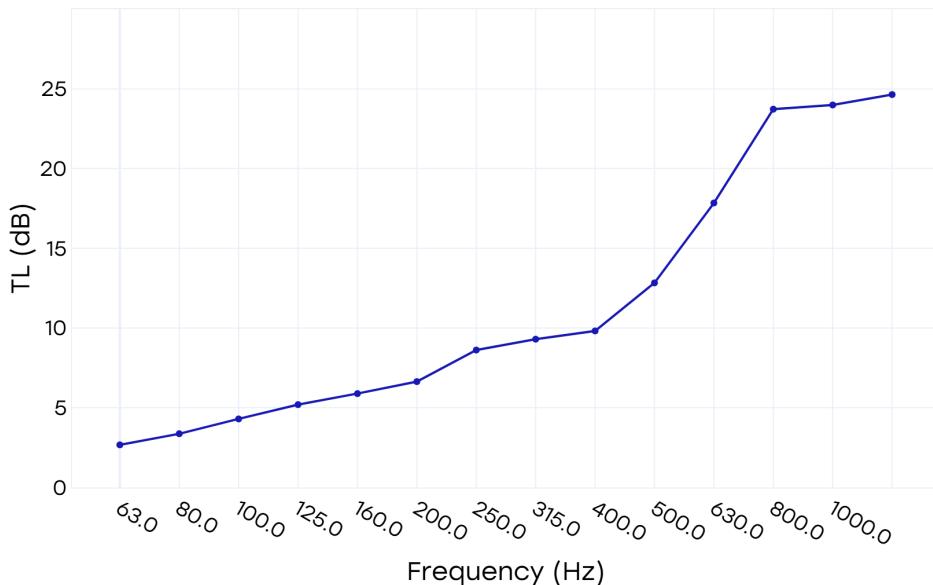

Passive	
63	2.7
80	3.4
100	4.3
125	5.2
160	5.6
200	6.6
250	8.6
315	9.3
400	9.8
500	12.8
630	17.8
800	23.7
1000	24.0

MECHANICAL PROPERTIES

Int. diameter	159 mm
Ext. diameter	326 mm
Length	290 mm
Mass	3.1 kg
Electric supply	220V / 5W

